

## Product information

# 90 31 03 BK

## KNIPEX TubiX® XL Pipe cutter



- QuickLock locking mechanism: independent holding and clamping on the tube
- Precise and quick: exact positioning of the cutting wheel on the pipe
- High-quality needle-bearings enable the cutting wheel and four guide rollers to cut with ease
- Cuts pipes with wall thickness up to 2 mm
- Cuts pipes from Ø 6 - 76 mm (1/4" - 3")
- Cutting wheel made of high-grade ball-bearing steel
- Quick replacement of the cutting wheel without any tools — spare cutting wheel stored in the handle
- Removable, precision-ground deburring tool
- For plumbing, heating and air conditioning: easily cut gas and water pipes made of copper, brass and stainless steel
- For the electrical trade: cuts rigid steel conduits and strips steel wire armoured cables

### General

Article No.	90 31 03 BK
EAN	4003773088127
Weight	865 g
Dimensions	260 x 100 x 42 mm
REACH compliant	does not contain SVHC
RoHS compliant	not applicable

### Technical details

Cutting capacities (diameter)	Ø 6 – 76 mm
-------------------------------	-------------

*technical change and errors excepted*








For cutting copper, brass and stainless steel pipes and rigid steel conduits with wall thickness up to 2 mm and diameters of 6-35 mm (1/4"-1 3/8")




In one easy step, the KNIPEX TubiX® XL can be positioned quickly and precisely on all pipes with a diameter between 6 and 76 mm

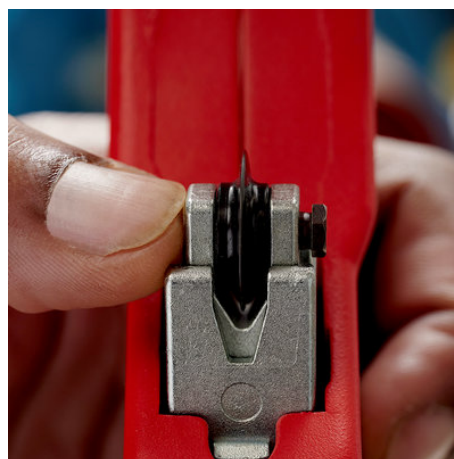

The needle-bearing and spring-loaded cutting wheel made of high-quality ball bearing steel is easily exchangeable

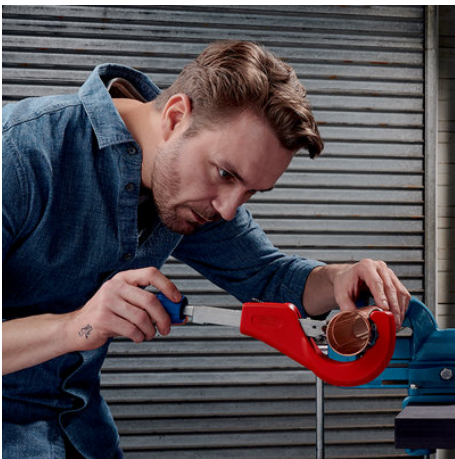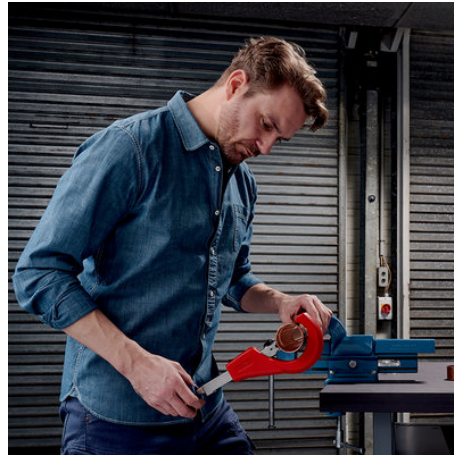


The precisely ground deburring tool can be taken out of the tool when needed.

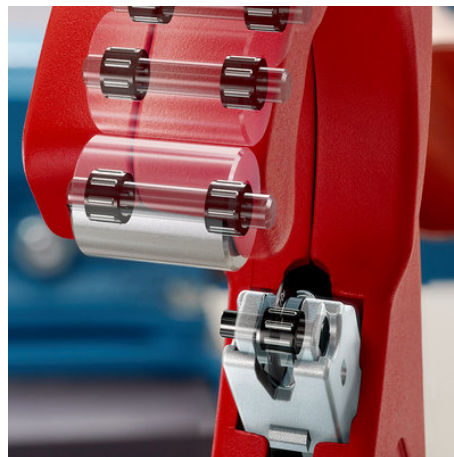

High-quality needle-bearings in the guide rollers and the cutting wheel reduce the friction for easier cutting.



A spare cutting wheel is stored in the blue handle for quick replacement

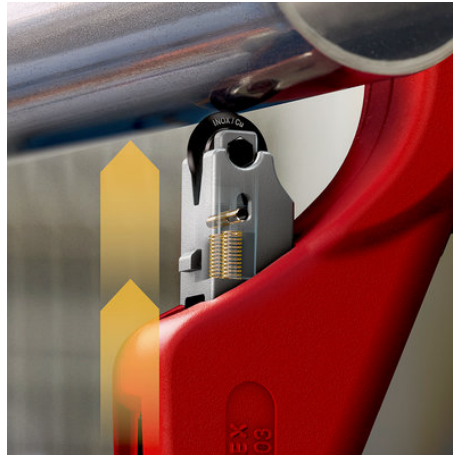

The spring-loaded cutting wheel keeps the KNIPEX TubiX® XL in place and prevents slipping



