

Product information

95 05 20 SB

Angled Electricians' Shears



MM $\angle 45^\circ$

- Precision-ground blades with fine serrations for a clean, non-slip cut
- Adapted to the hand: angled blades and optimised handle design for improved ergonomics
- Two crimping areas for wire ferrules of 0.5 - 6 mm² and 10 - 25 mm²
- Suitable for cutting of the following cables: 1 x 25 mm² such as H01 N2-D flexible / stranded rubber connecting and control cables for arc welding, 5 x 2.5 mm² such as H07 RN-F flexible and stranded heavy rubber hose line cable, flexible and stranded cables up to Ø 15 mm, 5 x 1.5 mm² such as damp-proof installation cables
- Includes opening spring and lock for easy storage
- Tether attachment point can be used with KNIPEX Tethered Tools System
- Cutting edges made from stainless steel, hardness of cutting edges 56 HRC
- Not suitable for cutting solid conductors
- Practical belt pouch (00 19 75 LE) available separately


General


Article No.	95 05 20 SB
EAN	4003773082699
Shears	mirror polished
Handles	with multi-component grips, glass fibre reinforced plastic
Weight	190 g
Dimensions	160 x 76 x 21 mm
REACH compliant	does not contain SVHC
RoHS compliant	not applicable

technical change and errors excepted




Practical belt pouch (00 19 75 LE) available separately

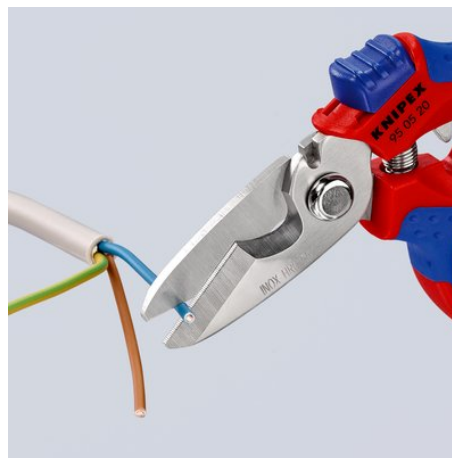

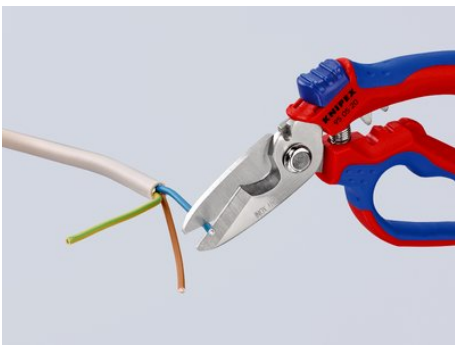

... and two crimping areas for standard wire ferrules sizes

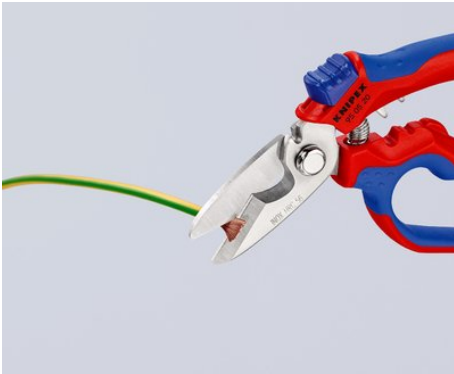

With fine serration for precise cutting ...





