

Product information


97 53 08

Self-Adjusting Crimping Pliers for wire ferrules

With front loading




- Compression from 0.08 - 10.0 mm² in one profile
- Wire ferrules up to 2.5 mm² can also be loaded parallelly from the side
- Suitable in particular for all twin wire ferrules up to 2 x 4 mm² or 2 x AWG 12
- For crimping wire ferrules according to DIN 46228 parts 1 + 4
- Self-adjusting adaptation to the desired wire ferrule size: no wrong crimps caused by using the wrong die
- Frontal insertion of the wire ferrules into the pliers
- Repetitive, high crimping quality due to ratchet mechanism (unlockable)
- Tools have been set precisely (calibrated) in the factory
- Optimum transmission of force thanks to toggle lever for fatigue-reduced operation
- Handy shape and low weight provide high operation comfort
- Approved crimping according to UL in conjunction with KNIPEX wire ferrules 97 99 330 - 399

General	
Article No.	97 53 08
EAN	4003773040187
Pliers	burnished
Handles	with multi-component grips
Weight	477 g
Dimensions	190 x 75 x 20 mm
REACH compliant	contains SVHC
RoHS compliant	not applicable
Technical details	
	
Application	Wire ferrules
Capacity in square millimetres	0.08 — 10 mm ²
Number of crimp profiles	1
AWG	28 — 8


technical change and errors excepted



97 53 08 and 09: Square crimp with automatic size adjustment

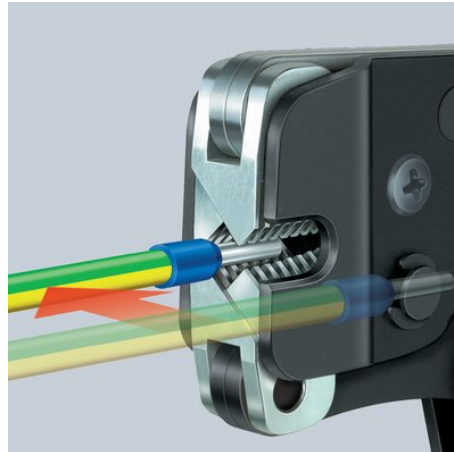

97 53 08: lateral loading of wire ferrules up to 2.5 mm² parallelly from the side e.g. in confined areas

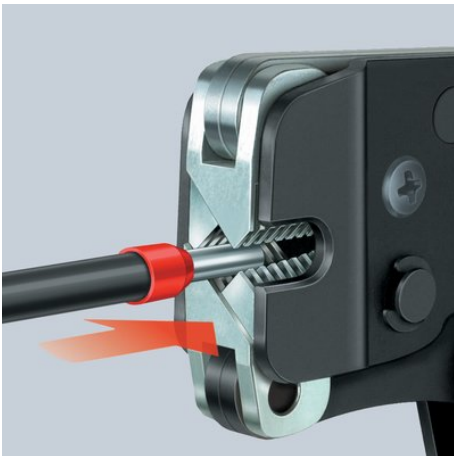

Front loading of wire ferrules e.g. in switchboards